


Technical Data

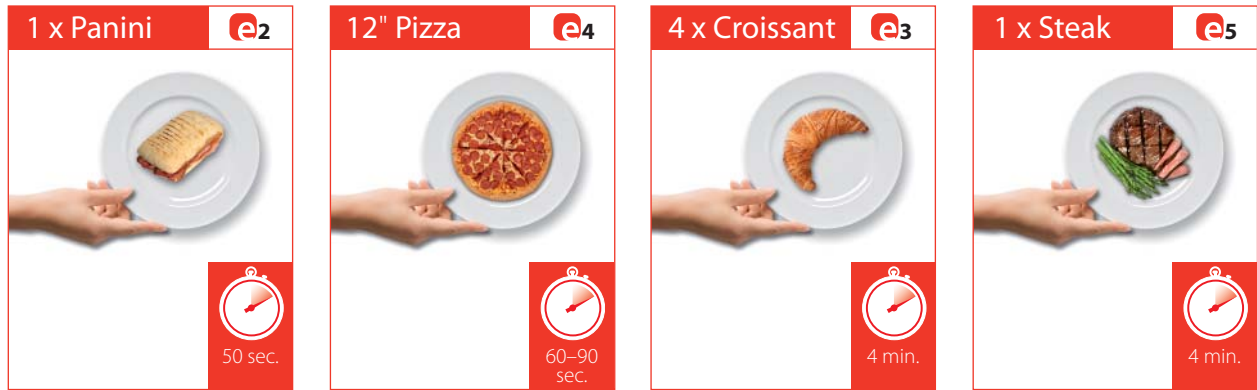

Product	Controls	Overall Dimensions (mm) (not including handle)			Power Output			Microwave power levels	Electrical Supply (50 Hz)	Electrical Supply (60 Hz)	Max Power / kW	Weight kg	Magn- etons	Supply -Europe (amps)	Supply -US (amps)
		Width	Depth	Height	100% m/w (W)	Convected heat (W)	Combi mode (W)								
e2	Touch screen	383	785	633	1000	2200	1000 + 1300	0% and 5%–100% in 1% incres- ments	single phase 230	N/A	3.4	68	1	16	20
e3 (EE)	Touch screen	597	622	548	700	3000	700/1500		Three- phase 380–400 Vac Single- phase 230 Vac. Refer to the spec sheet for other available country/ regional specific versions	N/A	3.0	62.5	1	13	N/A
e3 (XE)	Touch screen	597	622	548	700	3000	700/3000		N/A	4.3	62.5	1	32	N/A	
e3 (XX)	Touch screen	597	622	548	1000	3000	1000/3000		208/240 Vac Multi- voltage, (2P & E)	4.7	62.5	1	32	30	
e4	Touch screen	584	750	591	1500	3200	1500/3200		7.0	82.5	2	32	30		
e5	Touch screen	712	705	642	1400	3200	1400/3200		6.2	94.9	2	32	30		

Quality assured: BS EN ISO 9001 accreditation and CE marked.

Note: Depth with door open (including handle) e2: 1020mm; e3: 939mm; e4: 999mm; e5 992mm.
Measurements do not include clearances for ventilation. 60Hz available, please contact us.

Our policy is one of continuous improvement and the information in this leaflet is intended as a guide only.
Please refer to specification sheets available on our website for complete technical and installation details.

Manitowoc Foodservice is a global company dedicated to bringing value to foodservice operators by equipping them with highly individualized real-world answers that enhance menus, service, profits, and efficiency.

To learn how Manitowoc Foodservice and its leading brands can equip you, visit our global web site at www.manitowocfoodservice.com then find the regional or local resources available to you.

